


Window Schedule

Mark	Width	Height	Count
KW1	4' - 0"	3' - 0"	1
UW	4' - 0"	3' - 0"	2
UW1	3' - 0"	3' - 0"	1
V	2' - 6"	2' - 0"	4
W1	5' - 0"	4' - 0"	1
W3	4' - 0"	4' - 0"	4
W4	5' - 0"	4' - 0"	6
W5	4' - 0"	4' - 0"	4
W6	7' - 0"	4' - 0"	1
W7	2' - 6"	4' - 0"	4

Door Schedule

Mark	Height	Width
D1	7' - 0"	3' - 0"
D2	7' - 0"	2' - 6"
EDW	7' - 0"	5' - 6"
MD	7' - 0"	3' - 6"

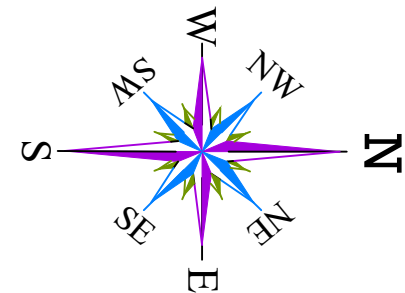

Area Statement

Buildup 162 sft

1. Opening schedule may change according to the structural design.
2. The Column layout is subjective to change upon structural consultant confirmation
3. Number of steps may change according to the plinth and parking height desired.
4. Thickness of walls is only proposed. It may have to change based on the structural design if the customer does not need column/beam projections to be visible.



Clayworks, 16/2 ,m 2nd Floor,
Sobha Alexander Plaza,
Commissariat Rd, Ashok Nagar,
Bengaluru, Karnataka 560025

NOTES:

-All dimensions are in feet and inches.
-Drawings to be read & not measured.

Details will supercede all drawings.

Project

Residence for Mrs.Suguna

Designed by: Ar.Arun K R
8129835157

Project No.

CRN 129053

Drg. No.

-

Date

08/06/2022

Drawing Title

Terrace Floor Plan

Scale

NTS